

NOVA N-4070

Flexible Presentation Counter Scanner



NOVA N-4070 Flexible Presentation Counter Scanner

Introduction

NOVA N-4070 is the continuation of the excellent optical design experience and with a new back-end design, to create an outstanding product performance and reliability. This scanner features high inerrability, flexibility, scanning, and decoding capability. It can deliver with an unequalled 3,000 scans per second scan speed and a unique scan pattern of 5 scan direction in total 30 scan lines, equipped with IP42 sealing protection design, it is ideally suited for supermarkets, pharmacies, petrol stations, and other similar retail stores.

Based on the standard product reliability, the product design concept is fully focused on user's context and mode. It also reduces time and cost. Our solutions provide instant and accurate scanning, making the checkout process more efficient for you and more convenient for your customers.

CHAMPTEK[®]
We value your ID's

www.champtek.com

NOVA N-4070

Features

- High scan performance with 30 scan lines and 3,000 scans per second scan speed.
- STAR code reconstruction decoding technology allows easy reading of truncated, damaged and substandard bar codes.
- Durable characteristic with IP42 sealing protection.
- Automatic sleep & wake-up function saves power and improves life time.
- Touch control sensors for volume adjustment.
- Multiple interface solution supports by automatic interface detection.

Specifications

Physical Characteristics

| | |
|--------|---------------------|
| Depth | 90.22mm / 3.55inch |
| Width | 152.02mm / 5.99inch |
| Height | 152.07mm / 5.98inch |
| Weight | 630 g ~ 720 g |

Electrical

| | |
|----------------------|---------------------|
| DC Input to Scanner | 12V DC, 500mA |
| Power Supply Voltage | 6 Watt max @ 12V DC |


Interfaces

RS-232 / USB / Powered-USB /
Keyboard Wedge(Optional)

Optical

| | |
|----------------|---|
| Light source | Visible laser diode (650 nm) |
| Depth of field | up to 250 mm@ EAN 0.33mm/ 13mil PCS 90% |
| Scan Pattern | 6 directions scan field, 30 lines scan pattern |
| Scan Rate | 3000 scans / second |
| Light Level | Max 7000LUX |

| | |
|---------------|--|
| Barcode types | Automatically discriminates all standard 1D bar codes include GS1 databar family, Omnidirectional, Stacked Omnidirectional, Expanded, Expanded Stacked, Truncated and Limited. |
|---------------|--|

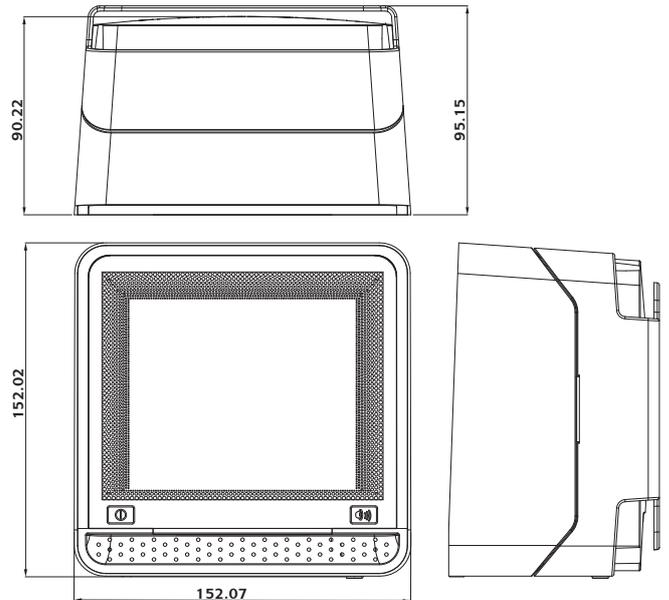

Environmental

| | |
|-----------------------|------------------------------|
| Operating Temperature | 0°C ~ 40°C / 32°F~104°F |
| Storage Temperature | -10°C ~ 60°C / 14°F~140°F |
| Humidity | 5% ~ 95% RH (non-condensing) |

Safety

| | |
|--------------|---|
| Laser Safety | IEC 825-1 Class I, U.S. CDRH: 21CFR1040 Class II a |
|--------------|---|

| | |
|-------------------|-------------------------|
| Electrical Safety | EN 60950 second edition |
|-------------------|-------------------------|

EM Compatibility

| | |
|---------------------------|--|
| Radio and TV Interference | EN 55024/22, FCC Part 15 class B, CNS 13438 |
|---------------------------|--|

CE, FCC and RoHs compliant 

Due to Champtek's / Scantech ID's continuing product improvement programs, specifications and features are subject to change without notice.